WURTH

ALLYOU NEED FOR WHEEL & TIRE



TABLE OF CONTENTS

Tire Information	3
Importance of Tire Maintenance	4
Reading a Tire Sidewall	5
Tools	6
Repair Products	12
Lead Wheel Weights	16
Balancing Beads	18
Zinc Wheel Weights	19
Steel Wheel Weights	20
Chemical Products	23
TPMS Sensor AID System	26
Safety Products	27



Your vehicle is only as good as THE TIRES IT RIDES ON!

According to CAA:

"Hitting potholes and consistently driving on poorly maintained roads throws out wheel alignment and diminishes the treads on tires, making it harder to steer in bad weather."



We are committed to providing you with highly reliable and effective products. Also, as often as possible we like to bring vehicle-specific products into our range.

> Talk to your representative for the latest information on how you can increase the quality of your customer's ride.

INF(

Why is Tire Maintenance **Important?**

Tire maintenance is often overlooked because vehicle owners focus on various exterior aspects and functionality of the vehicle such as the engine & radiator system, etc. The importance of properly maintaining your tires cannot be overemphasized, as tires are the only contacts between your vehicle and the road.

> Würth is committed to supplying the best quality products for your vehicle.

> > With our quality products and regular tire maintenance, not only will you have a better ride but it will also be more secure!

Steps for Tire Repair








(3) Buff & Cut



(4) Post-Clean



Finish - Wash & Protect

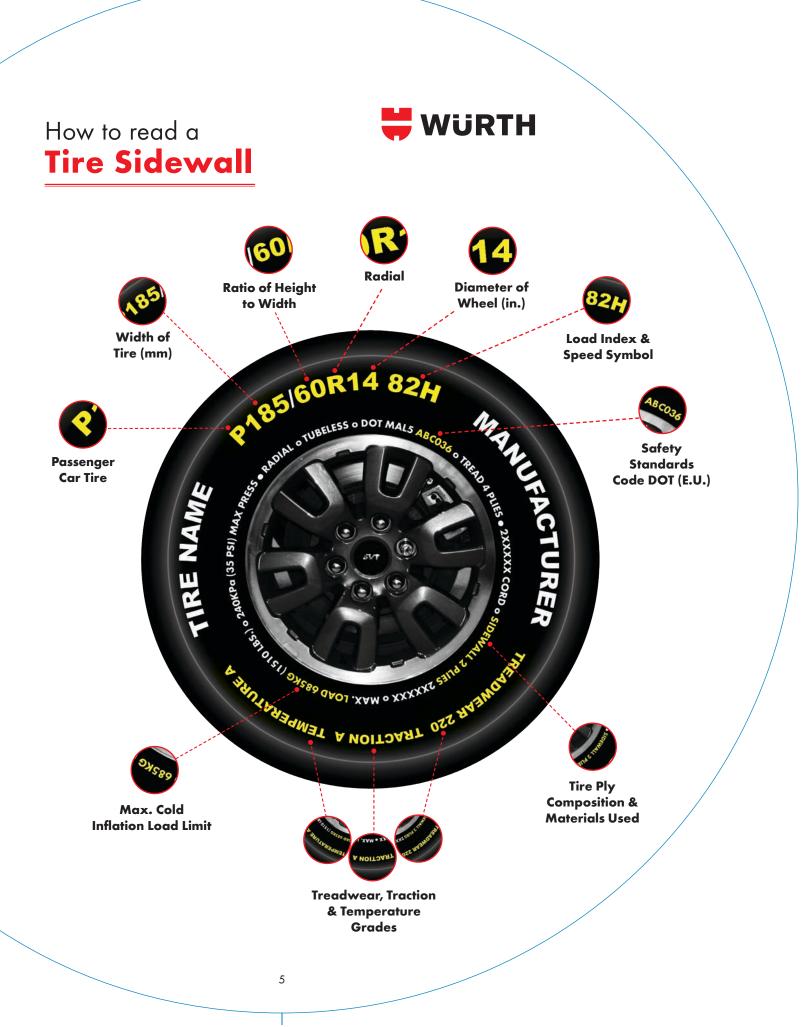



Stud Cleaning Brush Kit

697.900015 • 12 pcs.

All-in-one kit for ease of use!



• Quickly and effectively removes dust and debris • from wheel studs!



Cleans 10 studs in under 3 minutes!



You can trust Würth's quality brand of tools and accessories for all your tire and maintenance needs. Quality tools make tire service fast and easy!



Stud Cleaning Tools 13 mm • 697.900004 22 mm • 697.900005



Replacement Brushes 12–22 mm • 697.90...



Wheel Hub Cleaning Tool 585.1905 Designed to clean rust, corrosion and other build up from the base of the

wheel stud, wheel drums and tire rims.

Hub Cleaning Discs 1" • 585.2001 2" • 585.2002



2.5" Buffing Wheel 829.320



3/8" x 1/2" Buffing Wheel Adapter 829.3245



Skiving Brush 879.1433...

3.5" Knot Style Cup Brush Steel 714.33000 Stainless Steel 714.33001



SIMPLEX

Soft Face Hammer

715.7220

This soft face hammer won't damage wheels when extra removal force is required.





2" Surface Conditioning Discs (Type 'R') 585.42...

Use medium and coarse surface conditioning discs for steel surfaces. Use **fine and extra fine** surface conditioning discs for aluminum surfaces.



Type 'R' attachment

Blue Quick Strip Discs - Type 'R' 2"/3"/4" • 585.216... Effective in the removal of rust, paint, graffiti, undercoating and for metal cleaning prior to welding.

> Much safer and faster than steel wire wheels!



BRUSHES

9" Brake Saddle Brush 715.5526

Heavier than normal steel bristles (chromevanadium) for quick removal of debris and longer life.

> Great for cleaning the tight areas around wheel hubs/ wheel studs!





Hand Brush 697.4



Small Cleaning Brush 714.8311...

Application Swab 829.81556



Brass Tire Brush 697.9000

Tire Paste Brush 829.815561 🔒 Use with **Würth Tire** Fitting Paste 890.1221

7



Careful installation prevents damage to wheel coatings!





You can trust Würth's quality brand of tools and accessories for all your tire and maintenance needs. Quality tools make tire service fast and easy!



Installation Tool for Wheel Weights 695.391885



Non-Marking Wheel Weight Installer Tool for Aluminum 830.075 Heavy Duty Wheel Weight Installer Tool 830.050




Tire Repair Kit 829.100

Contents:

50 - 4" Fat Brown Inserts, Spiral Cement Probe, Split-Eye Insert Tool with Plastic Handle, 1 jar Iubricant, 1 knife, 1 repair booklet






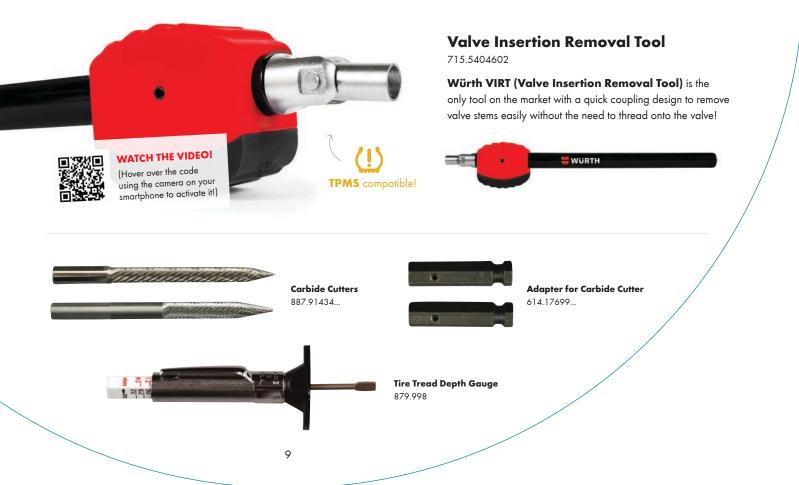



You can trust Würth's quality brand of tools and accessories for all your tire and maintenance needs. Quality tools make tire service fast and easy!

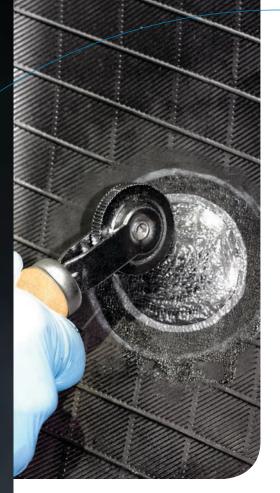

Inner Liner

Scraper 887.914315

Use together with

repair!

Buffing Solution (893.122003) to

remove dirt, debris, and

mold lubricants from the tire's inner liner prior to


Used to roll on the patch to ensure proper seal with the tire surface





Ball Bearing Stitcher 829.914

Flexible Skiving Knife 696.800900



714.541225 • 2 pcs.

No scratching of alloy wheels due to **GFK material!**

C.C.C.

Adhesive Wheel Weight Remover Tool

714.541221 Effortless removal of adhesive wheel weights and residue

WURTH

Torque Wrenches

714.712...



WURTH




You can feel confident when you use Würth brand tire repair products. Sending your customers back on the road will be quick, easy, and reliable with our solutions.

LEAD WIRE PATCHES

- Requires no special wire pulling tool
- Insert the lead wire into the injury from the inside of the tire and pull the repair through from the outside.
- Lead wire inserts will vulcanize chemically or in a heat curing system.
- 829.670 Patch Size Diameter: 1" Stem: 1/8" Injury Size: 1/16"
- 829.673 Patch Size Diameter: 2" Stem: 5/16" Injury Size: 5/16"

 829.674
 Patch Size Diameter: 2" Stem: 3/8"
 Injury Size: 3/8"

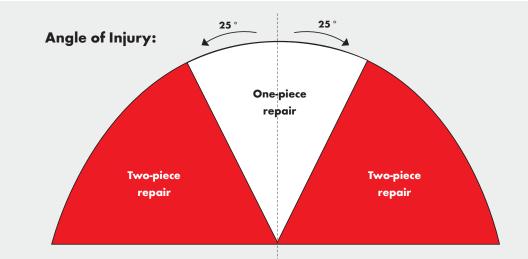



Wrapped Lead Wire Patches 879.940...



Grey Gum Poly Wrapped Insert Strips 829.33...



Rubber Vulcanizing Inserts 829.222



Fibre-Seal Inserts 829.220

TIRE PATCHES

All 4 patches can be used with Würth Activator Cement (890.100019)



Patch-N-Plug Radial & Bias Tire Repair 829.38...



Jiffy® Patches 829.00...



Magicure™ Ultra Thin Patches 829.072




Coi Radial Patches 829.1...



Radial Value Patch 829.41...



Vulcanizing Plugs









Brown Posi-Cord String

829.361 Used to fill punctured holes in radial and bias ply tires. These plugs are designed for emergency repair in passenger and light truck tires.



Pli-Seal Plug 829.331



High Pressure Snap-In Tire Valves 879.60...



1 1/4" Chrome Snap-In Tire Valve 879.174131



Rubber Snap-In Valve for TPMS 879.172008

Snap-In Tire Valves Quality snap-in tire valves for everyday use!



TR 413 (0.453" x 1.25") 879.041030 • 50 pcs. / 879.041030B • 500 pcs.

TR 414 (0.453" x 1.5") 879.041038 • 50 pcs. / 879.041038B • 500 pcs.

TR 418 (0.453" x 2") 879.041049 • 50 pcs.

TR 415 (0.625" x 1.25") 879.041031 • 50 pcs.



You can feel confident when you use Würth brand tire repair products. Sending your customers back on the road will be quick, easy, and reliable with our solutions.



Digital Tire Inflator

715.540061

WURTH

LIGHT

- Die cast aluminum unit with rubber sleeve for Heavy Duty use
- Backlit LCD with 90 second auto shut-off
- Advanced digital high precision reading

3-IN-1 FUNCTION!

- + Inflate
- + Deflate
- + Measure Tire Pressure




Inflator Gauge, Heavy Duty Passenger/Truck with 12" Hose (20-120 PSI) 715.54074

Dial Gauge for Passenger

Trucks (0-160 PSI) Without Hose • 715.54073 With 12" Hose • 715.54077

TPMS compatible!

Passenger/truck easy-to-read dial gauge with bleeder valve.







Replacement Universal Valve Core - Short 879.50



Metal Bolt-In Tire Valves









Chrome, 1 1/4" 879.428

Nickel, 1 1/2" Brass, 4 3/8" 879.573



879.416

Nickel-Plated Brass Valves for **Heavy Trucks** 60° Bend (O-Ring) • 879.545 60° Bend (Grommet) • 879.554, 879.555



Brass Valves for Heavy Trucks 1.50" • 879.501 / 3.75" • 879.572



🖶 WüRTH

Valve Caps





Long Skirt TPMS Valve Cap 879.174921, 2 Metal Screwdriver Cap 879.17491, 8 Heavy Duty Metal Truck Dome Cap with High Temperature Silicone Gasket 879.17494, ⁽²⁾ Double Seal Valve Cap for Better Air Retention 879.17579, Ong Skirted Metal Dome Cap with High Temperature Silicone Gasket 879.17492, O Chrome Hex Head Valve Cap with High Temperature Silicone Gasket 879.17493, **Ø** Black Plastic Cap 879.45, **3** Grey Plastic Cap 879.455, **9** Green Plastic Cap to Indicate Nitrogen Filled Tires 879.451

Air Chucks 715.540...

Air chucks for standard bore tire valves.

Open chucks are used with tire changers and tire inflators, that can control the flow or stopping of airflow.

Closed chucks are used with live air lines where there is no other control for stopping the air from escaping. The pin inside the chuck compresses when pushed up against the tire valve to allow the air to flow.

Passenger Car Weights





MCS SERIES (Plastic Coated) 1/4 oz. to 3 oz. 830.203... Buick, Cadillac, Chevrolet, Dodge, Chrysler, Ford, Hyundai, GMC



FNS SERIES (Polyester Coated) 5G to 60G 830.209... Acura, Honda, Infiniti, Lexus, Mazda, Nissan, Toyota, Fiat, Subaru



LAWS SERIES (Short Clip) 5G to 60G 830.207... BMW, Jaguar, Suzuki, Volvo, Kia, Mitsubishi, Ford, Lincoln, Mazda, Mini, Smart, Hyundai



REG SERIES (13"-15" Steel Wheels) 10G to 50G 830.111... Used on passenger car steel wheels



ENS SERIES (Polyester Coated) 10G to 50G 830.200... Audi, Mercedes, VW Also used for alloy wheels with thin rim flanges!



AWS SERIES (Polyester Coated) 1/4 oz. to 3 oz. 830.205... Chrysler, Ford, GM, C5 Corvette



GY-UNIVERSAL STEEL (Uncoated) 1/4 oz. to 5 oz. 830.5... Special Honda weight, used on passenger car steel wheels



Würth offers a wide range of lead wheel weights for all makes and models. Browse some of our most popular selections here - and find our full range on our eShop!





Truck & Pickup Weights



TAL-S SERIES 2 oz. to 8 oz. 831.200... Used on heavy trucks equipper

Used on heavy trucks equipped with Alcoa or Accuride tubless alloy wheels. Fits both sides of the wheel.



I-7 SERIES 2 oz. to 8 oz.

2 oz. to 8 oz. 831.100... Used on the majority of medium and heavy duty trucks equipped with tube-type tires.



TS SERIES 5G to 60G 830.110... Used on full size pickups trucks and vans.

Balance = Quality

An unbalanced tire can adversely affect ride quality, shorten the life of your tires, bearings, shocks and other suspension components. As well, it can be the difference between a good or bad driving experience. Some cars (and drivers) are more sensitive to an unbalanced tire than others, but no one is happy with a vibration.

More Lead Weights



Low Profile Pre-Cut (Polyester Coated Lead) 830.14.305 / 830.14.30552 Length: 6" / Weight: 1/4 oz. / For all applications.



Narrow, Pre-Cut (Polyester Coated Lead) 830.014.60 Length: 6" / Weight: 1/4 oz. For all applications. Narrow - Ideal for Motorcycles.



Regular, Reduced Middle Web (Polyester Coated Lead) 830.14.315 Length: 6" / Weight: 1/2 oz. For all applications. Powerful cold weather adhesive.



Regular, Reduced Middle Web (Polyester Coated Lead) 830.14.320 Length: 6" / Weight: 1 oz. For all applications. Powerful cold weather adhesive.



Low Profile Pre-Cut Black (Polyester Coated Lead) 830.14.3100 Length: 3/4" x 6" / Weight: 1/4 oz.



Balancing beads provide a solution for wheel and tire assemblies that are not traditionally balanced. Ask your Würth Sales Representative for more information on how to use our balancing beads.



Tire Balancing Beads

Due to its patented electrostatic technology, Würth Balancing Beads hold the out of balance position inside the tire when the vehicle moves slowly, stops, starts and turns. Würth Balancing Beads provide a 100% true balance of not only the tire and wheel, but the entire wheel assembly.

Recommended Applications	Weight	Number of Sachets per Package	Art. No.	P. Qty.	Case Art. No.	Case Qty.
Motorcycles/ATV	1 oz.	4	822.016301	1	822.016301B	40 bags/160 sachets
	2 oz.		822.016302		822.016302B	32 bags/128 sachets
Passenger Vehicles/ Light trucks	3 oz.		822.016303		822.016303B	24 bags/96 sachets
	4 oz.	- 1	822.016304		822.016304B	92 bags/sachets
	6 oz.		822.016306		822.016306B	64 bags/sachets
	8 oz.		822.016308		822.016308B	52 bags/sachets
	10 oz.		822.016310		822.016310B	40 bags/sachets
Light - Medium & Heavy Trucks	12 oz.		822.016312		822.016312B	36 bags/sachets
	14 oz.		822.016314		822.016314B	42 bags/sachets
	16 oz.		822.016316		822.016316B	28 bags/sachets
	20 oz.]	822.016320		822.016320B	24 bags/sachets



Note: It is recommended to install balancing beads with the Würth Injector Tool (822.0200)

ADVANTAGES



Increase

tire life





Environmentally friendly

Würth Balancing Beads provide a 100% true balance of not only the tire and wheel, but of the entire wheel assembly.

Improve fuel economy Reduce vibrations

18



Pre-Segmented Adhesive Weights

5G to 45G Cold Weather • 830.9000...








MCZS – 1/4 oz. to 2 oz. 832.203... Buick, Cadillac, Chevrolet, Dodge, Chrysler, Ford, Hyundai, GMC

C B

FNZS – 5G to 50G 832.209... Acura, Honda, Infiniti, Lexus, Mazda, Nissan, Toyota, Fiat, Subaru



IAWZS – 5G to 60G 832.207... BMW, Jaguar, Kia, Mitsubishi, Volvo, Ford, Lincoln, Mazda,





A Greener Option

Würth Canada offers zinc and steel wheel weights as a greener alternative without sacrificing all the important characteristics such as retention and corrosion resistance. Switching to a lead-free alternative will allow each of us to reduce the accumulation of lead in our environment.



Zinc is the premium alternative material to lead and the choice of most OEMs! Shop our full range on our eShop or ask your Würth Sales Representative for more information.

13

PLASTEEL® WHEEL WEIGHTS

Steel weight with the look of a traditional weight!

A revolutionary steel core clip-on wheel weight encased in a plastic overmold. Lead weights are a major cause of damage to alloy wheels. The reaction, called galvanic corrosion, induced by the contact of lead with the aluminum of the wheel, causes discolouration and pitting of the alloy. **This is completely eliminated with Plasteel®**.



PLASTIC BODY / PREVENTS CORROSION ALUMI-FLAKETM METALLIC MATERIAL



AW SERIES - 1/4 oz. to 3 oz. 836.205... Chrysler, Ford, GM



T SERIES – 1/4 oz. to 3 oz. 836.110... Suburban, Yukon, Tahoe, Denali & Escalade, Ford, Lincoln





MC SERIES – 1/4 oz. to 3 oz. 836.203... Chrysler, Ford, GM



FN SERIES – 5G to 60G 836.209... Acura, Daewoo, Honda, Infiniti, Isuzu, Lexus, Mazda, Nissan, Toyota



20



Our environmentallyfriendly steel wheel weights provide excellent corrosion resistance. They have a rounded clip end for a scratch-free installation as well as superior retention! They are also OEM quality, fit, form, and function.



STEEL WHEEL WEIGHTS



TFE – 5G to 60G 833.110...
Used on pickup trucks and vans (Chrysler, Ford, GM)



AWFE - 1/4 oz. to 3 oz. 833.205... Used on older vehicles (Chrysler, Ford, GM)



FNFE – 5G to 60G 833.209... Used on most Japanese vehicles (Acura, Daewoo, Honda, Infiniti, Isuzu, Lexus, Mazda, Nissan, Toyota)



MCFE - 1/4 oz. to 3 oz. 833.203...
Used on most North American vehicles (Chrysler, Ford, GM)



IAWFE – 5G to 60G 833.207... Used on most European and Korean vehicles (Audi, BMW, Catera, Geo, Hyundai, Jaguar, Kia, Mitsubishi, Subaru, Suzuki, Volvo)



PFE - 1/4 oz. to 3 oz. 833.111... Used on all steel wheels for passenger cars



A Greener Option


Würth Canada offers zinc and steel wheel weights as a greener alternative without sacrificing all the important characteristics such as retention and corrosion resistance. Switching to a lead-free alternative will allow each of us to reduce the accumulation of lead in our environment.

ADHESIVE STEEL WHEEL WEIGHTS

Low Profile Pre-Cut (Polyester Coated Steel) 830.14.3050 Length: 7 1/4" / Weight: 1/4 oz. increments



Low Profile Pre-Cut (Polyester Coated Steel) 830.14.30501 Length: 7 1/4" / Weight: 5G increments



Steel Wheel Weights on a Roll 833.14...

Weight: 1/4 oz., 1/2 oz. or 5G Fully recyclable. Only 1 SKU to carry. No waste. Easy to dispense (simply rip off desired weights). Corrosion-tested. Economical alternative to composite weights.



Composite Wheel Weight Roll System 835.61400

Stand, Cutter, and 3 Rolls. Stand and Cutter are not available separately.

Individual / 4mm / 20lb. Roll 835.61405

STEEL WHEEL WEIGHTS

		Adhesive an easy to Unconnected indi no cutting edges of	vidual weights,		Adhesive weights on a convenient roll! Saves time, as lengthy searching and sorting of individual weights is not necessary	
		STRIPS	ROLLS		Clear zinc Clear zinc plated and grey coated Clear zinc plated and black coated	
ENSURE GOOD ADHESION. Use IPA Surface Prep and Cleaner 893.223500	\sim	830.909105	Not available		SFe SFe SFe SFe SFe	
	5g	830.911105	830.906001	•		
	U	830.911250	830.906101			
	1/4 oz	830.909025	830.905001		9/1 9/4 9/1	
		830.911025	830.906201	•		
		830.909125	830.906225			
	$1/_{2}$	830.905150	830.906501	•	$\frac{h_{2}}{1^{p_{1}}}$ $\frac{1}{1^{p_{2}}}$ $\frac{21}{1^{p_{2}}}$ $\frac{1}{1^{p_{2}}}$	
	OZ	830.910150	Not available	•	$\frac{\partial A}{\partial p_{ijk}} = \frac{\partial p_{ijk}}{\partial p_{ijk}} = \frac{\partial A}{\partial p_{ijk}} $	
	5/10 grams	830.901105	Not available	•	tere Per	
	5g	830.906105	Not available	•	1929 (2020 2020) (2020) (2020) (2020) (2020) 1920) (2020) (2020) (2020) (2020) (2020) (2020) 1920) (2020) (2020) (2020) (2020) (2020) (2020) (2020) (2020)	

FEATURES

Grams & Ounces available

Premium clean peel cold weather adhesive on strips. Cold weather adhesive on rolls

Extended liner prevents adhesive contamination when removing

CHEMICAL PRODUCTS FOR INSTALLATION



Tire Lube (Ready-to-Use) 890.122101 • 3.78 L An environmentally friendly lubricant that helps tire beads seat properly and protects them from damage during the mounting or demounting process.





Tire & Rubber Lubricant 890.12500 • 440 g A special spray lubricant that facilitates the assembly and disassembly of rubber parts.



AL 1100 893.1100 (Spray) • 242 g 893.11010 (Paste) • 1000 g

High temperature aluminum paste with excellent adhesive lubricating, separating and corrosion protection.



Würth quality chemical products are reliable and provide you with premium installation results!



Tire Mount/Demount Compound 890.1225 • 25 lbs. Protects tire beads from damage and helps beads to seat properly.



Tire Fitting Paste 890.1221 • 11 lbs.

Pressure resistant, transparent fitting film. For fitting of car, truck and motorcycle tires. Excellent lubrication.

23





CHEMICAL PRODUCTS FOR INSTALLATION



Vulcanizing Tire Cement 890.100019 • 236 mL 890.100012 • 946 mL For general purpose repair - patch to tire bonding.



Inner Liner Sealer 893.455472 • 472 mL For use with all passenger, commercial, truck, farm service and O.T.R. tires.



Bead Sealer High Strength: 890.122000 • 946 mL Regular Strength: 890.122001 • 946 mL Bead Sealer is used as a positive seal

between the rim and tire to prevent air pressure loss.



Tire Prep (Pre-Buffing Cleaner) 893.122003 • 453 g 829.490996 • 946 mL For removing dirt, debris and mold lubricants from the repair area prior to buffing.



Würth quality chemical products are reliable and provide you with premium installation results!



Leak Detector 890.20 • 400 g

Finds leaks in compressed air and gas systems Easy and time saving way of finding leaks while the system is still working.



Leak Seeker Concentrate 892.450238 • 238 mL

Find the injury location fast! For use on tires, tubes and rims.

CHEMICAL PRODUCTS FOR CLEANING & PROTECTION




Eco Aluminum Wheel Cleaner 890.10250 • 500 mL

890.10200 • 300 mL 890.102024 • 4 L 890.102020 • 20 L Particularly well suited for polished and high quality

polished and high quality alloy wheels. Dissolves brake dust, road salt, dirt and tar.

BURNER BU

Aluminum Wheel Cleaner 890.102 • 500 mL Removes even the most stubborn deposits of brake dust and tar stains, and other hard-to-remove contaminants.



890.12104 • 4 L

mi (16

ETTOYANT ÉCO

Water-based formula will not cause microcracking of the tire surfaces. This solventfree formulation contains no VOCs.





Eco Lustre Metal Polisher 893.15460 500 mL



Silicone-Free Tire Shine 890.1215 306 g



Tire Dressing 890.121500 • 500 mL 890.121004 • 4 L / 890.121020 • 20 L



Foaming Tire Cleaner 890.121 • 412 g



Würth quality chemical products are reliable and provide you with premium installation results!

TPMS SENSOR AID SYSTEM WITH OBD II 879.02405





Sensor AID is designed to diagnose and interact with tire pressure monitoring sensors using wireless (radio frequency) communication.

TPMS Sensor Kit Contents:

Sensor AID tool, OBD II Interface, power adapter, USB connector, TPMS owner's manual, warranty card

WURTH



Sensor AID will verify the unique identity of each sensor mounted on wheels, display current pressures, internal tire temperature and battery condition of the sensor.

Cloning and programming 4 OEM sensors to Würth TPMS sensors can be done in under **1 minute combined!**

NOVA Foam Lined Safety Glasses

899.103218 / 899.103220

Comfortable and lightweight safety glasses with integrated foam padding to limit eye exposure to dust particles.



Removable, flame resistant foam padding helps limit eye exposure to dust and particles while providing additional cushioning



Ear Plugs - Individually **Wrapped Pairs** 899.300900 • 200 PR/BX



Black PU Protective Gloves 899.4024... • Sizes: 6-11 Black polyurethane coated gloves that provide outstanding grip and abrasion resistance.



Ear Defenders with a **Universal Headband** 899.300.280

Great insulation, even in the low range!



N95 Disposable **Particulate Respirator** 899.081740 · 10/BX



Ensure you have the right PPE products on hand to keep eyes, ears, and hands safe while performing tire service.

DISPOSABLE RESPIRATORS


These masks are designed to provide comfortable and reliable worker respiratory protection against certain non-oil based particles.



N95 Disposable **Particulate Respirator** 899.081730 · 20/BX

WURTH

Your favourite product is just a click away!

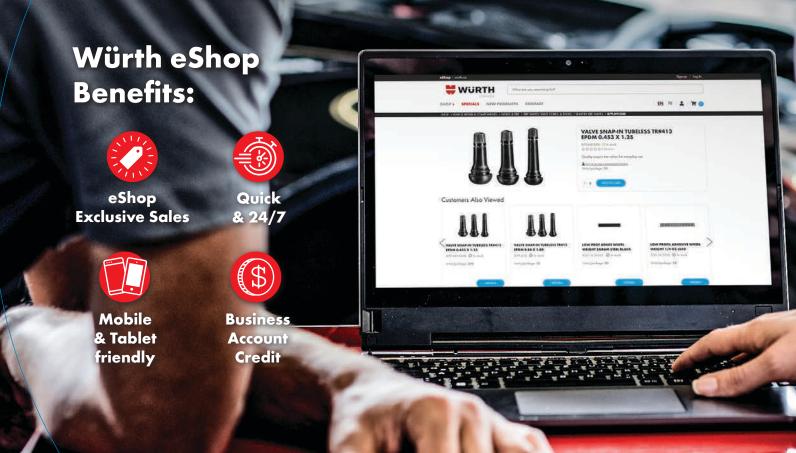

SHOP ONLINE NOW! SHOP.WURTH.CA

Printed in Canada. All rights reserved. May not be reproduced, in part or in whole, without prior consent.

Würth Canada Limited

345 Hanlon Creek Boulevard Guelph, Ontario, Canada N1C 0A1 T (905) 564-6225 F (905) 564-3671 info@wurth.ca