

# 05 PAINTS & PRIMERS

- 2** Spray Primers
- 3** Spray Paints
- 4** Sprayer for Spray Cans
- 8** "Perfect" Metal Surface Sprays
- 10** Paint Markers
- 10** Micro Brushes



## SPRAY PAINT PRIMERS



### An industrial primer for maximum rust protection and adhesion

#### Features:

- Improves long-term durability of finishing top coats
- Can be used with lacquer, enamel, and acrylic paints
- Provides excellent corrosion resistance
- Better coverage than conventional primers. Contains 23% solid content
- For best results, primer can be sanded lightly with a fine sandpaper
- Heat resistant to 120°C

#### Dry Time:

- To touch: 5 minutes
- To recoat: 20 minutes

Note: Curing time is extended with multiple and excessively thick coats

Name	Colour	Art. No.	Content
High Solids Primer Light Grey		<b>892.150001</b>	482 g
High Solids Primer Red Oxide		<b>892.150002</b>	
General Use Primer Light Grey		<b>892.140001</b>	340 g

## SELF-ETCH PRIMER



**Art. No. 890.91701** 340 g

- This primer etches the surface of the bare metal to replace the metal conditioning step. It provides excellent corrosion protection.
- Use on steel, aluminum, galvanized steel, zinc coated steel and fiberglass
- You can apply topcoat directly on this Self-Etching Primer
- Excellent adhesion
- Corrosion resistant
- Dries fast
- Good filling and sanding

## SELF-ETCHING PRIMER



**Self-etching primer adheres to bare metal to replace the metal conditioning step. Suitable for use on metal, aluminum, galvanized steel, zinc coated steel and fiberglass.**

#### Features:

- Provides excellent adhesion on steel, aluminum and stainless steel
- Dry to the touch in under 15 minutes
- Top coat can be applied directly on top of the product

#### Application:

- Surface must be degreased and sanded and rust must be removed. Do not apply over newly painted surfaces.
- Shake container for 1 minute after mixing ball moves freely. Spray approximately 30 cm from the surface. Apply two thin coats, allowing 5 minutes flash time between coats. Top coat can be applied after 30 minutes.
- Once finished, turn can upside down and spray for 3 seconds to prevent clogging.

Colour	Contents	Previous Art. No.	NEW Art. No.	P. Qty.
Black	340 g	8856.917000	<b>8856.917010</b>	1
Olive Green		8856.917001	<b>8856.917011</b>	

## ZINC RICH WELD THRU PRIMER



Art. No. 893.109 464 ml

Zinc Rich Weld Thru Primer protects steel from corrosion by sacrificial or galvanic action. When applied to metal surfaces prior to MIG or spot welding, the zinc melts and fuses to the surface of the steel, reducing the formation of rust and rust creeping.

### Features:

- 98 - 99% pure zinc content.
- Heat resistant up to 490°C (914°F)
- Good electrical conductivity
- Special epoxy resin for better adhesion to metal
- Adheres reliably to all metals
- Long term cathodic protection for all metallic surfaces.

Note: DO NOT apply filler after application

## PREMIUM SELF-ETCHING PRIMER



Art. No. 890.91700 340 g

A unique and convenient primer that provides excellent adhesion to bare metal, primers and top coats.

- Excellent sanding properties
- Good filling characteristics
- Strong adhesion to metals
- Superior adhesion of primer surfaces and other top coats
- Fast drying

## LACQUER SPRAY



### High-Quality Spray Lacquer

#### Excellent coverage with a lustrous finish

A remarkably versatile spray paint with the most outstanding performance characteristics available anywhere


- Has an exclusive resin base
- Can be used on both interior and exterior surfaces such as wood, metal and can be recoated anytime
- Bare metal surfaces should be primed before application
- Ideal for guide coating
- Lead free
- Art. No's. 893.339006 and 893.351930 can also be used on wheels

Colour	Finish	Contents	Art. No.
Matte Jet Black	High - Temp	296 g	893.359005
Satin Black	Satin	310 g	893.349110
Matte Jet Black	Matte	300 g	893.329005
White Aluminum	High - Gloss	462 g	893.339006
Clear	High - Gloss	317 g	893.351930
Yellow	High - Gloss	308 g	893.364464
Silver	Metallic Silver	340 g	893.339108
Cast Iron	Cast Iron	340 g	893.379008

Temperature resistance for Art. No. 893.359005 is 650 °C (1,200 °F)

# SPRAY PAINT - PREMIUM HIGH SOLIDS

**A superior industrial spray paint when maximum performance is needed**

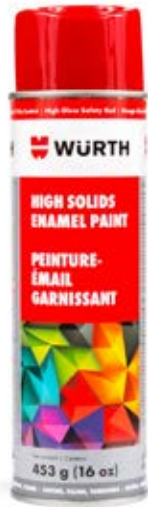


























**Use with our Sprayer  
for Spray Cans,  
Art. No. 891.090**

**Features:**

- High solid content (35%)
- Provides twice the coverage of conventional spray paints. Up to 18 square feet.  
Cans contain 16oz (454g) of paint
- Does not run or sag
- Can be applied to bare metal, and inhibits rust
- Resists oil, gas, and sunlight
- Heat resistant to 150°

**Application:**

1. Clean and dry surface to remove dirt and grease
2. For maximum protection, the surface should be primed before painting
3. Shake can for at least 1 minute after hearing the mixing ball rattle.
4. Spray surface with steady strokes at a distance of 20-25cm from surface
5. When finished, turn can upside down and spray for 3 seconds (not for general use paint)

Name	Finish	Colour	Art. No.	Content
Gloss Black	Gloss		<b>892.150003</b>	453g
Satin Black	Satin		<b>892.150004</b>	
Flat Black	Flat		<b>892.150005</b>	
Gloss White	Gloss		<b>892.150006</b>	
Flat White	Flat		<b>892.150007</b>	
Light Grey	Gloss		<b>892.150008</b>	
Grey	Gloss		<b>892.150009</b>	
Dark Grey	Gloss		<b>892.150010</b>	
IH Red	Gloss		<b>892.150011</b>	
Safety Red	Gloss		<b>892.150012</b>	
Bright Orange	Gloss		<b>892.150013</b>	
Safety Orange	Gloss		<b>892.150014</b>	
Old CAT Yellow	Gloss		<b>892.150015</b>	
New CAT Yellow	Gloss		<b>892.150016</b>	
School Bus Yellow	Gloss		<b>892.150017</b>	
Tractor Yellow	Gloss		<b>892.150018</b>	
OSHA Yellow	Gloss		<b>892.150019</b>	
Safety Yellow	Gloss		<b>892.150020</b>	
Tractor Green	Gloss		<b>892.150021</b>	
Shamrock Green	Gloss		<b>892.150022</b>	
Safety Green	Gloss		<b>892.150023</b>	
Astro Blue	Gloss		<b>892.150024</b>	
Safety Blue	Gloss		<b>892.150026</b>	
Lift Blue	Gloss		<b>892.150025</b>	
Aluminum	Metallic		<b>892.150027</b>	

**Note:** Above colour samples are approximations.

## SPRAY PAINT CONTINUED

General Use				
Name	Finish	Colour	Art. No.	Contents
Gloss Black	Gloss		<b>892.140002</b>	340 g
Satin Black	Satin		<b>892.140003</b>	
Flat Black	Flat		<b>892.140004</b>	
Gloss White	Gloss		<b>892.140005</b>	
Flat White	Flat		<b>892.140006</b>	
Grey	Gloss		<b>892.140007</b>	

### A top quality paint that provides a tough, durable finish

#### Features:

- 360° Spray nozzles. Works upside down
- Fast drying with good coverage
- Rust inhibiting, and resists chipping and peeling

#### Dry Time:

- To touch: 5 minutes
- To recoat: 30 minutes
- Note: Curing time is extended with multiple and excessively thick coats

Engine Enamels				
Name	Finish	Colour	Art. No.	Contents
Universal Black	Gloss		<b>892.140011</b>	340 g
Universal Gray	Gloss		<b>892.140012</b>	
Cummins Beige	Gloss		<b>892.140013</b>	
Chevy Orange	Gloss		<b>892.140014</b>	
Alpine Green	Gloss		<b>892.140015</b>	
Ford Blue	Gloss		<b>892.140016</b>	
GM Blue	Gloss		<b>892.140017</b>	
Mustang Blue	Gloss		<b>892.140018</b>	

### A fast-dry spray paint for restoring engines and brake calipers to their original factory colour

#### Features:

- Replicates original factory colours
- Fast drying with good coverage
- Provides corrosion protection for engines, transmissions, and other O.E.M equipment
- Resists heat up to 120°C and does not crack or peel

#### Dry Time:

- To touch: 5 minutes
- To recoat: 30 minutes
- Note: Curing time is extended with multiple and excessively thick coats

High-Heat Paint				
Name	Finish	Colour	Art. No.	Contents
Black	Flat		<b>892.140025</b>	453 g
White	Gloss		<b>892.140026</b>	
Aluminum	Gloss		<b>892.140027</b>	

### A high temperature, heat-resistant paint

#### Features:

- Withstands continuous temperatures up to 650°C
- The porcelain-like bond resists peeling and blistering

#### Dry Time:

- To touch: 5 minutes
- For a hard cure, this product must be heated to a minimum of 205°C for two hours
- DO NOT use a primer
- Note: Curing time is extended with multiple and excessively thick coats

## ANTI-SLIP PAINT



**Slip-resistant paint to prevent slip and falls on wet or dry surfaces.**

**Features:**

- Slip-resistant coating
- Contains plastic beads within an epoxy resin

**Benefits:**

- Applications in institutional, industrial or commercial surfaces.
- Use on metal, wood, concrete, masonry, asphalt, floors, walkways, tool handles, ramps, stairs, truck beds, grab bars, ladders or anywhere an anti-slip coating is needed.
- Easy to use aerosol format which applies a textured anti-slip coating to almost any surface.
- Ideal choice for reducing accidents due to slippery surfaces.

**Tack Free:** 60 minutes

**Fully Cured:** 24 hours

Recoat surface every 2 to 4 months, depending on wear.

**Suggested Uses:**

- **Automotive**  
Step bumpers, running boards, truck beds, garage floors
- **Industrial**  
Stairs, steps, floors, tool handles, rails, ladders
- **Marine**  
Boat decks, docks, piers, grab handles
- **Construction**  
Heavy equipment steps, stairs, ladders, handles
- **Home, Lawn and Garden**  
Kitchen and bathroom floors, tool handles, tractor steps
- **Cargo**  
Docks, trailer floors, steps, handles

Colour	Contents	Art. No.	P. Qty.
Black	340 g	890.00061	1

## BUMPER AND TRIM PAINT



**Art. No. 893.0190** 425 g

- Trim black flexible paint for refinishing metals, plastic bumpers and flexible trim components.
- Its etching formulation eliminates the need for priming.
- Can also be applied on aluminum, stainless steel and galvanized steel.
- Etching properties.
- Very flexible.
- Dries fast.
- Matches OEM coating.
- Easy to control fan spray.

## SPRAY PAINT - INVERTED TIP MARKING PAINT



**Application:** Locators, construction sites, excavation sites, landscaping, surveyor's markings, utility marking, golf courses, mining, etc.

**Advantages:**

- Fast drying
- Non-clogging
- Vivid lines
- Safe on grass
- Easy to aim with low over-spray
- Meets APWA standard colours (American Public Works Association)
- 453 g



Technical Data	
Dry to touch	15 mins
Application Temperature	+10 - 40 °C (+50 - +100 °F)
VOC compliant	Yes
Finish	Flat, non-glossy (<15 on a 60° gloss meter)
Resin system	V.T. Alkyd
Application Temperature	+10 - 40 °C (+50 - +100 °F)
Storage Temperature	+5 - +32 °C (+40 - +90 °F)

Colour	Sample	Art. No.	Qty.
Fluorescent Orange		893.199301	1
Fluorescent Red/Orange		893.199302	
Fluorescent Pink		893.199303	

## ZINC SPRAY LIGHT 96.5%



**Art. No. 893.113114** 324 g

**Long-term protection and repair of metallic surfaces.**

**Features:**

- Excellent corrosion protection
- Contains 96.5% of pure zinc
- Thermal stability is approximately +240 °C
- Over 100 hours of salt-spray resistance (DIN 50021 SS)
- Excellent adhesive properties on bare metal
- Excellent spot-welding properties

**Areas of Application:**

- For visual improvement, repair and protection against corrosion of metallic surfaces

**Note:** Not suitable as adhesive base for PU, MS-polymer and hybrid sealing compounds.

# METAL SURFACE SPRAYS "PERFECT"



### Outstanding long-time protection and optimum metal surface appearance.

- **High layer thickness in 1st spray pass.** Very safe due to optimal protection against weathering. Minimal time required, as only one work step necessary. Covers well.
- **Can be used on residual rust.** Only loose rust must be removed.
- **For variable use thanks to adjustable spray head.** Large-area and minor repairs can be carried out quickly and safely with the variable spray head.

- **High resistance to running**
- **High abrasion resistance**

### Additional advantages

#### Zinc Spray and Zinc Spray light:

- Tested high level of corrosion protection according to DIN 50021 SS in salt spray test  
Zinc Spray Light Perfect: 250 hours  
Zinc Spray Perfect: 500 hours  
Tested by the TÜV Rheinland Group  
Optimal for spot welding


**Application:** For optical improvement, repair and protection against corrosion of metallic surfaces.

Corrosion protection after 240 hours of salt spray test acc. to DIN 50021 SS



#### Function of the variator variable spray head

Infinitely adjustable change in the output rate and the spray width by turning the variable adjustment wheel. (front view of the spraying pattern)

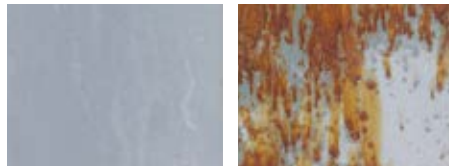

**Zinc Spray Light Perfect**

Competitor's Product

Description	Colours	Contents	Art. No.	P. Qty.
Zinc Spray Perfect 99%		460 g	<b>893.114113</b>	1/12
Zinc Spray Light Perfect 98.5%		325 g	<b>893.114114</b>	
Aluminum Spray Matte Perfect		280 g	<b>893.114115</b>	
Stainless Steel Spray Perfect		298 g	<b>893.114116</b>	
Brass Spray Perfect		315 g	<b>893.114117</b>	
Copper Spray Perfect			<b>893.114118</b>	
Aluminum Silver Spray High-Gloss Perfect		270 g	<b>893.114119</b>	

**Note:** The products Zinc Spray Perfect and Zinc Spray Light Perfect contain zinc, and therefore offer optimum, active cathodic protection against corrosion. If the surface is damaged, the zinc coating sacrifices itself (sacrificial anode) and therefore protects the metal against rust. The remaining products offer protection of the entire surface treated against rust. If the surface is damaged, the metal is not protected further. Not suitable as adhesive base for PU, MS- polymer and hybrid sealing compounds.



## TECHNICAL DATA FOR METAL SURFACE SPRAYS

Product Name	Zinc Spray Light	Zinc Spray Perfect	Zinc Spray Light Perfect	Aluminum Spray Matte Perfect	Stainless Steel Spray Perfect	Brass Spray Perfect	Copper Spray Perfect	Aluminum Silver Spray High-Gloss Perfect
Art. No.	893.113114	893.114113	893.114114	893.114115	893.114116	893.114117	893.114118	893.114119
Chemical Basis	Alkyd resin combination	Alkyd resin	Alkyd resin combination	Alkyd-acrylate combination	Alkyd resin combination	Nitri-combination resin	Nitri-combination resin	Ethyl-cellulose synthetic resin
Pure Zinc	96.50%	99%	98.50%	-	-	-	-	-
Cross Cutting (DIN 53151)*	Gr0-1	Gr0-1	Gr0-1	Gr0-1	Gr0-1	Gr0-1	Gr0-1	Gr0-1
Salt Spray test (DIN 50021 SS)	100 hrs	500 hrs	250 hrs	-	-	-	-	-
Dry layer thickness 1 back-and-forth motion	approx. 30 µm	approx. 40 µm	approx. 40 µm	approx. 50 µm	approx. 30 µm	approx. 25 µm	approx. 36 µm	approx. 7 µm
Recomm. layer thickness	70 µm	40 µm	40 µm	50 µm	30 µm	25 µm	25 µm	7 µm
Dust-dry (with recommended dry layer thickness)	approx. 15 min.	5 min.	approx. 15 min.	20-30 min.	approx. 15 min.	5 min.	6 min.	Approx. 15 min.
Completely hardened (with recommended dry layer thickness)	10-12 hrs	60 min.	10-12 hrs	approx. 8 hrs	10-12 hrs	80 min.	90 min.	4-6 hrs
Touch-dry (with recommended dry layer thickness)	15-20 min.	18 min.	15-20 min.	45-60 min.	20 min.	14 min.	17 min.	25 mins.
Can be spot welded	Yes	Yes	Yes	-	-	-	-	-
Thermal stability	approx. +240 °C (+464 °F)	approx. +500 °C (+932 °F)	approx. +300 °C (+572 °F)	approx. +250 °C (+482 °F)	approx. +240 °C (+464 °F)	approx. +100 °C (+212 °F)	approx. +100 °C (+212 °F)	approx. +240 °C (+464 °F)
Minimum shelf life at +10 °C to +25 °C (+50 °F to +77 °F) in months	24	24	24	24	24	24	24	24
Surfaces with good adhesion	Ferrous metals Galvanised surfaces Polycarbonate Polystyrene PMMA	Steel Galvanized steel	Ferrous metals Galvanised surfaces Polycarbonate Polystyrene PMMA	Metal, wood, pasteboard, Polycarbonate Polystyrene PMMA	Metal, wood, pasteboard, Polycarbonate Polystyrene PMMA	Brass, steel	Copper, steel	Metals, wood, pasteboard
Suitable for painting over	Condition: Preliminary testing required!							

\* Test to determine the adhesion of a coating on a foundation. Gr0 = Very good adhesion. Gr5 = Very bad adhesion.

## PAINT MARKERS - BRITE MARK



### General purpose permanent marker

- Quick drying, oil-based.
- Won't fade, chip or lose its opacity.
- Resists most work-related abuses or compounds.
- Valve action mechanism prevents paint in barrel from drying.
- Heavy-duty aluminum body with large paint capacity.
- Formula is not xylene-based.
- Drying time: 25-35 seconds.

### Application:

Excellent for identifying inventory, assemblies, tools, finished products or works-in-progress. Marks metal, rubber, plastic, glass, concrete, leather, stone, wood, vinyl and more.

Colour	Sample	Art. No.	Contents	P. Qty.
Blue		825.84001	12 ml	1
Black		825.84002		
White		825.84003		
Yellow		825.84004		
Orange		825.84005		
Red		825.84006		
Green		825.84007		

## PAINT MARKERS - SUDZ-OFF



### Detergent removable marker for water resistant temporary writing

- Marks can be removed with detergents with a pH of 10 or higher.
- Valve action mechanism prevents paint in barrel from drying.
- No "ghosting" when paint is removed.
- Xylene-free.
- Drying time: 15-20 seconds.

### Application:

For use on non-treated, non-painted and non-porous metal and glass surfaces. Excellent for quality control.

Colour	Sample	Art. No.	Contents	P. Qty.
White		825.91146	12 mL	1
Yellow		825.91694		

## MICRO BRUSHES



### For precision application of paints on vehicle body due to minor paint or chip damage

### Features:

- Lint-free
- Ribbed finger grip with a flexible tip
- 100 mm length
- Easy dispensing container
- Non-drip

### Benefits:

- The ultra-fine fibers are lint-free and leave no residues on the surface.
- The flexible tip allows extremely precise work, even in hard-to-access areas.
- Leaves vehicle undamaged with no residue
- Used to apply tiny amounts of oil, paint, glue, solvents, etc., accurately and controllably.
- Used in body shops, automotive repair, wood work and hobbyist shops

### Application Areas:

- Paint dabbing, precision paint repair, auto detailing, cleaning, cosmetic paint touch-ups and minor paint repairs.

### Great for Customers that purchase:

- Stabilant 22A (**Art No. 893.622**)
- Contact OL (**Art. No. 893.60**)
- or Dielectric Grease (**Art. No. 893.844100**)

Art. No.	Description	Colour
890.586701	Standard-100 pcs.	Blue
890.586702	Medium-100 pcs.	Yellow
890.586703	Fine-100 pcs.	White